
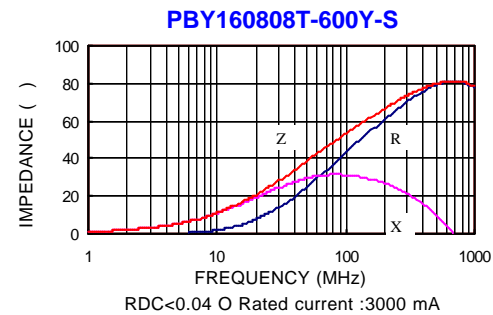
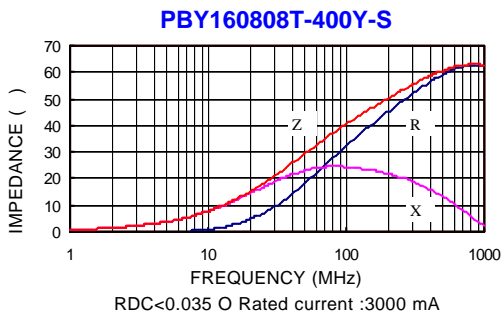
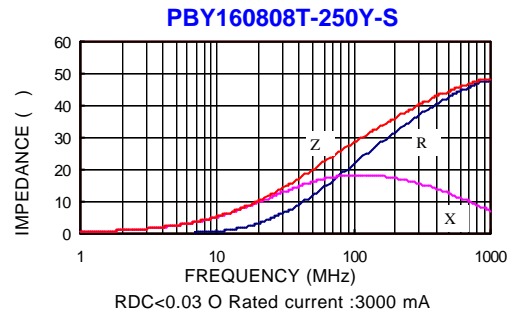


SMD Multilayer Ferrite Chip Beads - PB160808 Series

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance (±25%)	D.C. Resistance () max.	Rated current (mA) max.
PBY160808T-110Y-S	100	11	0.02	4000
PBY160808T-250Y-S	100	25	0.03	3000
PBY160808T-400Y-S	100	40	0.035	3000
PBY160808T-600Y-S	100	60	0.04	3000
PBY160808T-121Y-S	100	120	0.08	2500
PBY160808T-151Y-S	100	150	0.085	2000
PBY160808T-181Y-S	100	180	0.09	2000
PBY160808T-201Y-S	100	200	0.095	2000
PBY160808T-301Y-S	100	300	0.10	2000
PBY160808T-501Y-S	100	500	0.15	1500
PBY160808T-601Y-S	100	600	0.20	1000
PBY160808T-102Y-S	100	1000	0.25	800

Test Instruments : HP4291A Impedance / Material Analyzer

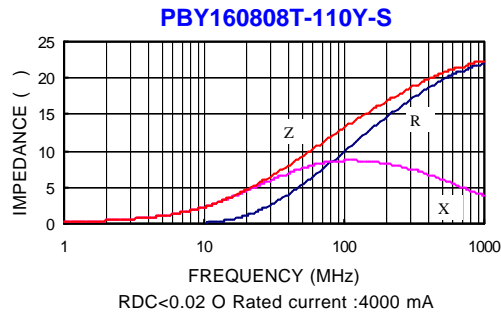

SMD Multilayer Ferrite Chip Beads - PB160808 Series

Test Instruments : HP4291A Impedance / Material Analyzer

