
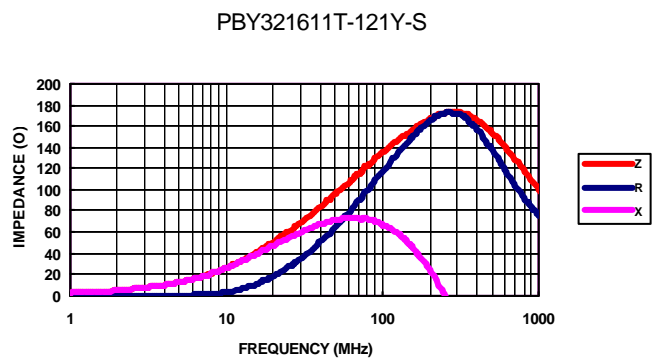
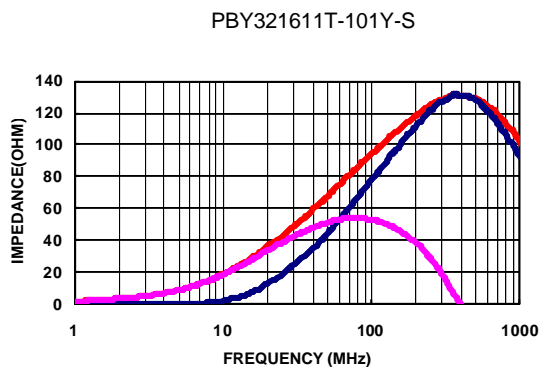
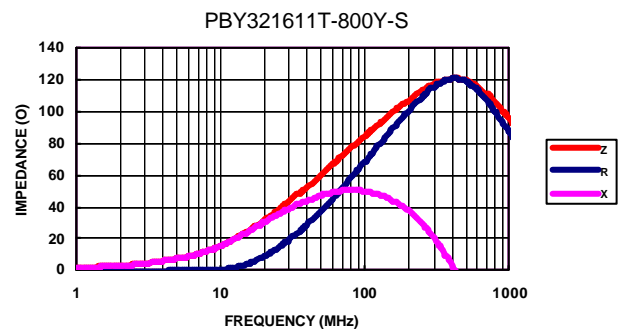
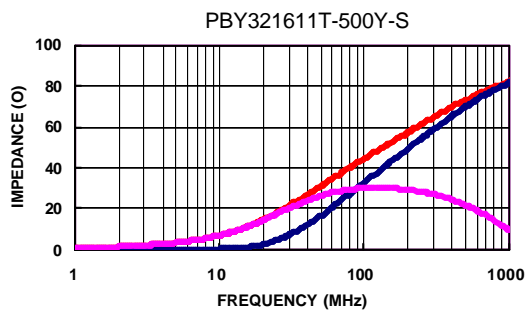
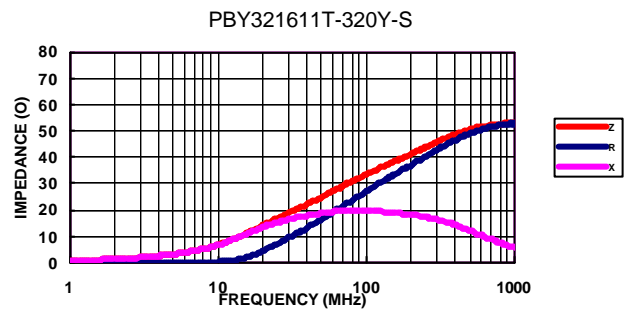


SMD Multilayer Ferrite Chip Beads - PB321611 Series

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\pm 25\%$)	DC Resistance () max.	Rated current (mA) max.
PBY321611T-190Y-S	100	19	0.015	6000
PBY321611T-320Y-S	100	32	0.015	4000
PBY321611T-500Y-S	100	50	0.02	4000
PBY321611T-800Y-S	100	80	0.025	3000
PBY321611T-101Y-S	100	100	0.03	2500
PBY321611T-121Y-S	100	120	0.03	2500
PBY321611T-221Y-S	100	220	0.05	2000
PBY321611T-301Y-S	100	300	0.06	2000
PBY321611T-601Y-S	100	600	0.10	2000
PBY321611T-102Y-S	50	1000	0.15	1200
PBY321611T-122Y-S	50	1200	0.18	1000
PBY321611T-152Y-S	50	1500	0.20	800

Test Instruments : HP4291A Impedance / Material Analyzer

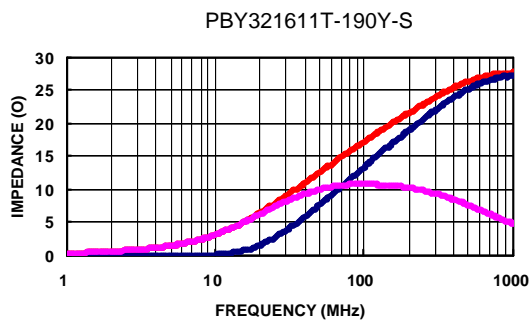

SMD Multilayer Ferrite Chip Beads - PB321611 Series

Test Instruments : HP4291A Impedance / Material Analyzer

