


SMD Multilayer Ferrite Chip Beads – SB160808 Series

Electrical Characteristics


Part Number	Test Frequency (MHz)	Impedance (±25%)	DC Resistance () max.	Rated current (mA) max.
SBK160808T-110Y-S	100	11	0.05	500
SBK160808T-190Y-S	100	19	0.08	500
SBK160808T-300Y-S	100	30	0.10	400
SBK160808T-400Y-S	100	40	0.10	400
SBK160808T-600Y-S	100	60	0.10	300
SBK160808T-800Y-S	100	80	0.15	300
SBK160808T-121Y-S	100	120	0.25	300
SBK160808T-221Y-S	100	220	0.30	200
SBK160808T-301Y-S	100	300	0.40	200
SBK160808T-451Y-S	100	450	0.50	200
SBK160808T-601Y-S	100	600	0.50	200
SBK160808T-751Y-S	100	750	0.70	200
SBK160808T-102Y-S	100	1000	0.70	200
SBK160808T-152Y-S	100	1500	1.00	50
SBK160808T-222Y-S	100	2200	1.20	50
SBK160808T-272T-S	100	2700	1.30	50

Test Instruments : HP4291A Impedance / Material Analyzer


SBK160808T-110Y-S

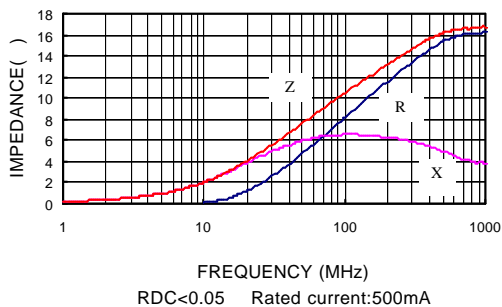


SBK160808T-190Y-S

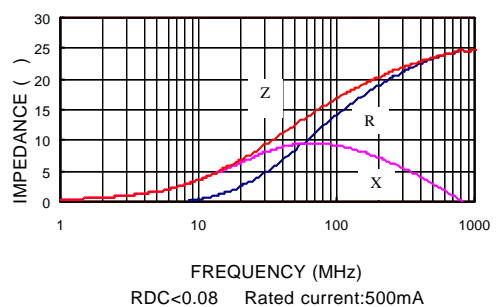

SBK160808T-300Y-S

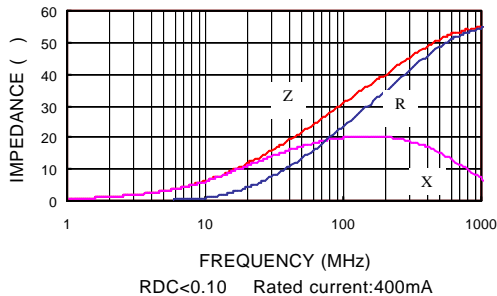


SBK160808T-400Y-S

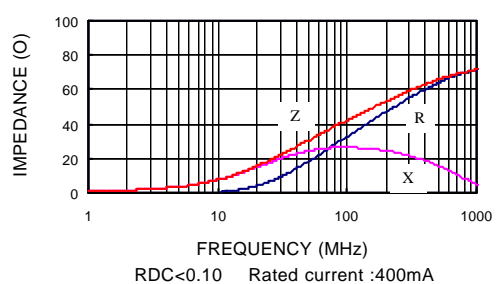


SMD Multilayer Ferrite Chip Beads – SB160808 Series

Test Instruments : HP4291A Impedance / Material Analyzer


SBK160808T-600Y-S

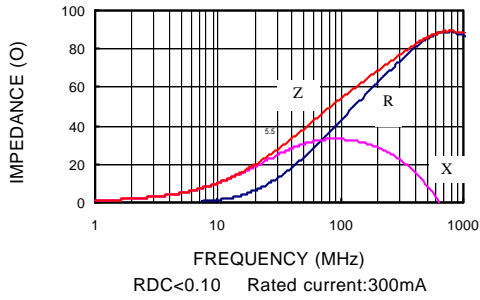


SBK160808T-800Y-S

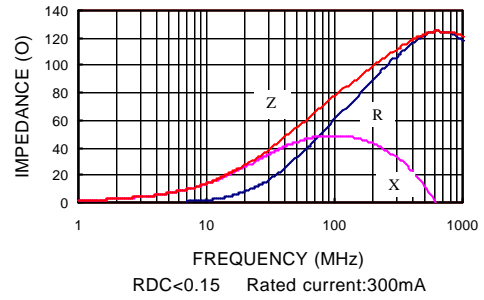


SBK160808T-121Y-S

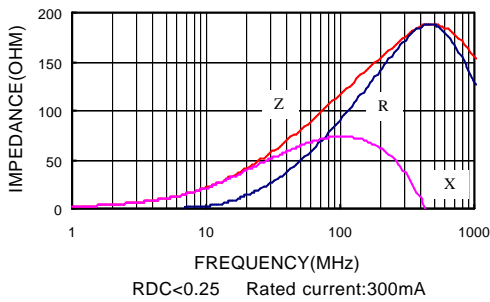


SBK160808T-221Y-S

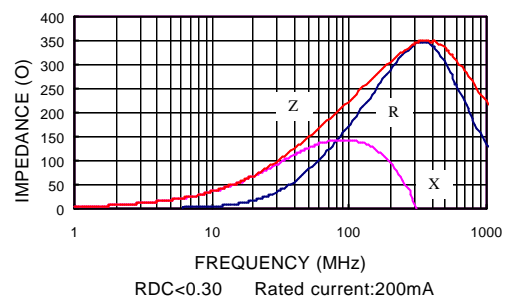


SBK160808T-301Y-S

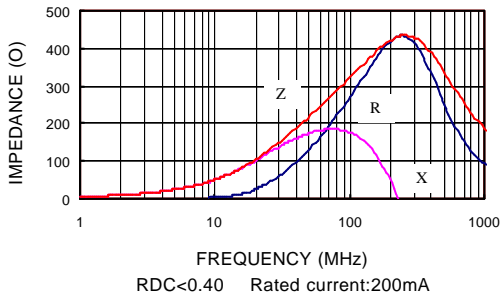


SBK160808T-451Y-S

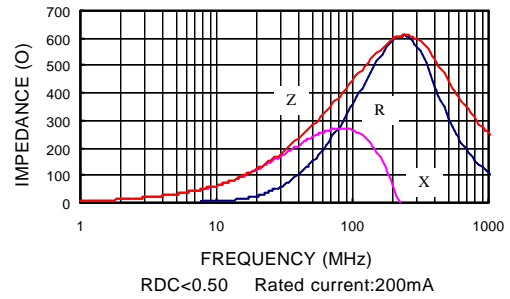

SBK160808T-601Y-S

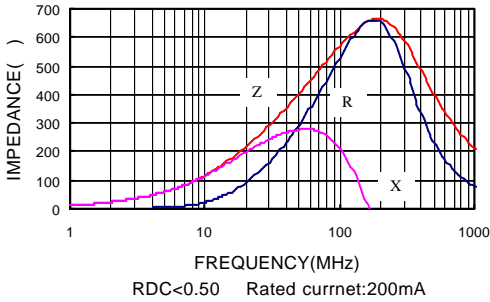

SBK160808T-751Y-S

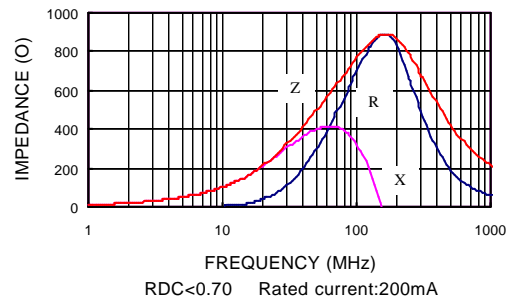

SMD Multilayer Ferrite Chip Beads – SB160808 Series

Test Instruments : HP4291A Impedance / Material Analyzer

