


# SMD Multilayer Ferrite Chip Beads – SB321611 Series

## Electrical Characteristics


Part Number	Test Frequency (MHz)	Impedance ( ±25%)	DC Resistance ( ) max.	Rated current (mA) max.
SBY321611T-190Y-S	100	19	0.05	600
SBY321611T-260Y-S	100	26	0.05	600
SBY321611T-320Y-S	100	32	0.05	600
SBY321611T-500Y-S	100	50	0.10	500
SBY321611T-600Y-S	100	60	0.10	500
SBK321611T-700Y-S	100	70	0.10	500
SBK321611T-900Y-S	100	90	0.15	500
SBK321611T-121Y-S	100	120	0.15	500
SBK321611T-151Y-S	100	150	0.15	500
SBK321611T-201Y-S	100	200	0.20	400
SBK321611T-401Y-S	100	400	0.20	400
SBK321611T-501Y-S	100	500	0.20	400
SBK321611T-601Y-S	100	600	0.30	400
SBK321611T-102Y-S	50	1000	0.40	200
SBK321611T-122Y-S	50	1200	0.40	200
SBK321611T-152Y-S	50	1500	0.45	200
SBK321611T-202Y-S	30	2000	0.60	200
SBK321611T-272Y-S	30	2700	0.60	200

Test Instruments : HP4291A Impedance / Material Analyzer


**SBY321611T-190Y-S**

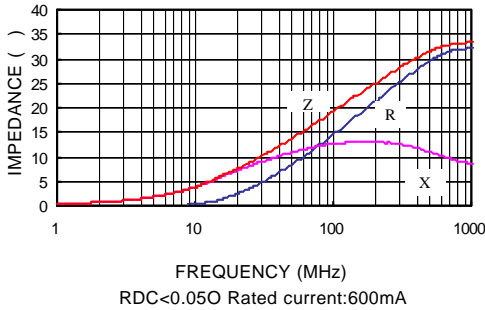


**SBY321611T-260Y-S**

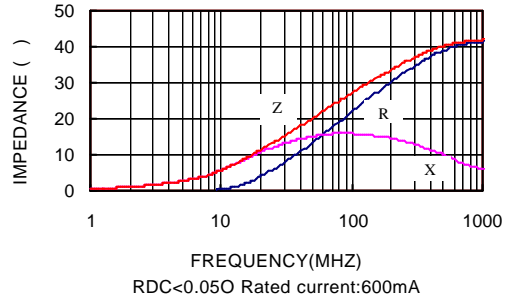

**SBY321611T-320Y-S**

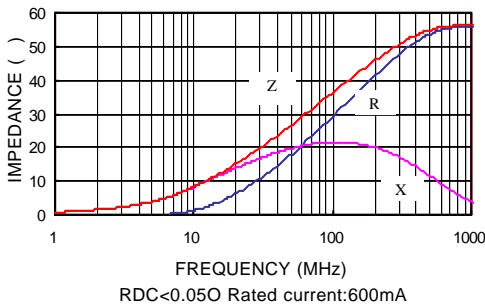


**SBY321611T-500Y-S**

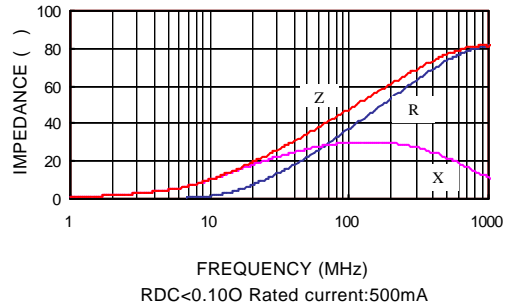


# SMD Multilayer Ferrite Chip Beads - SB321611 Series

Test Instruments : HP4291A Impedance / Material Analyzer


**SBY321611T-600Y-S**

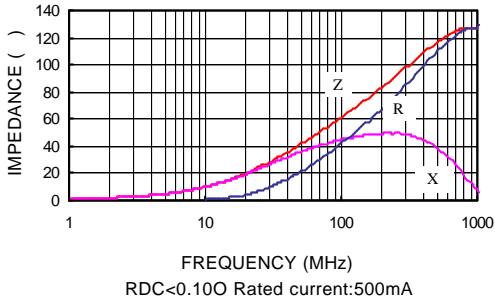


**SBK321611T-700Y-S**

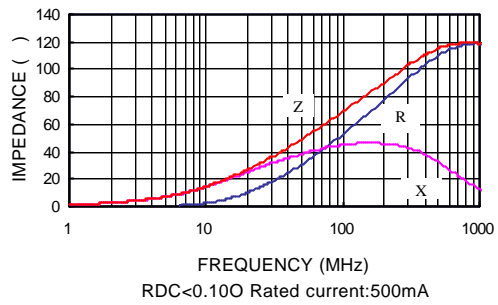


**SBK321611T-900Y-S**

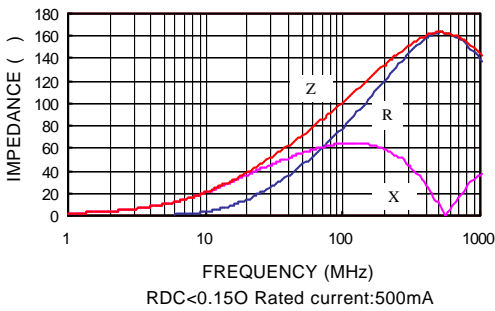


**SBK321611T-121Y-S**

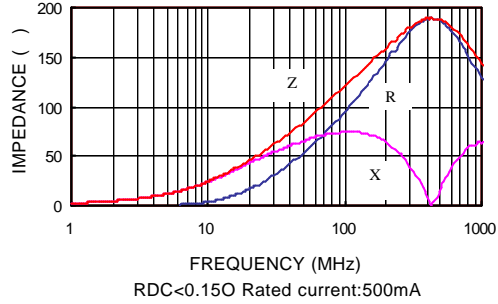


**SBK321611T-151Y-S**

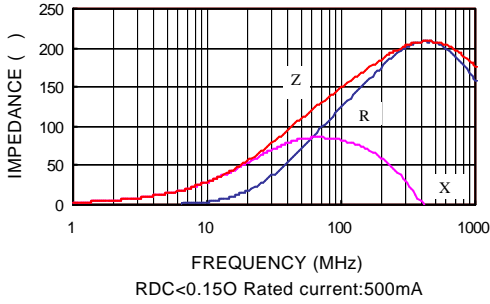


**SBK321611T-201Y-S**

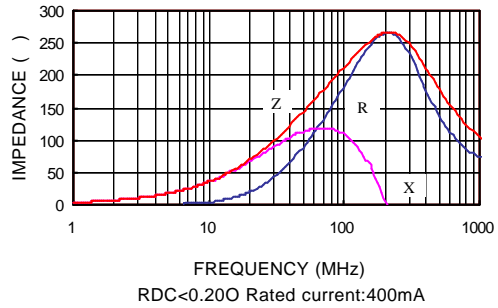

**SBK321611T-401Y-S**

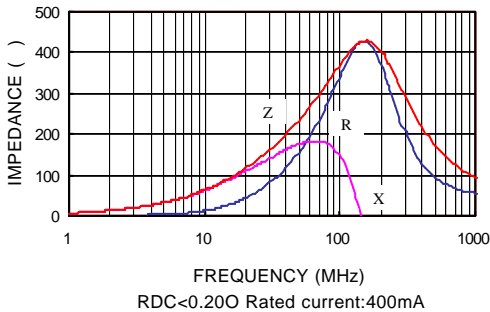


**SBK321611T-501Y-S**

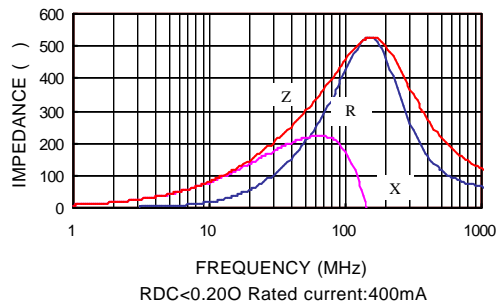


# SMD Multilayer Ferrite Chip Beads - SB321611 Series

Test Instruments : HP4291A Impedance / Material Analyzer


**SBK321611T-601Y-S**

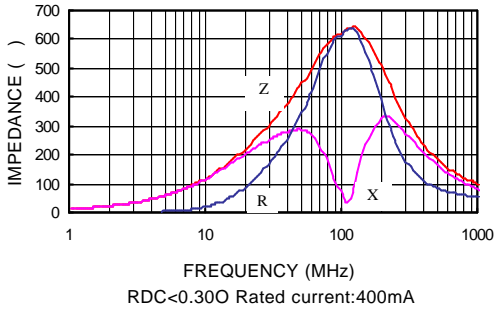


**SBK321611T-102Y-S**

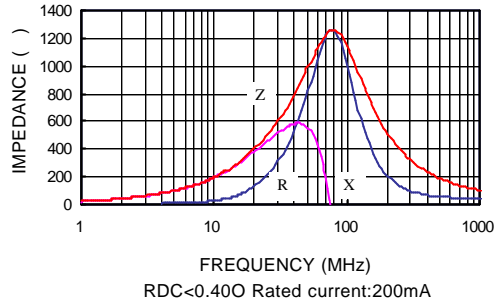


**SBK321611T-122Y-S**

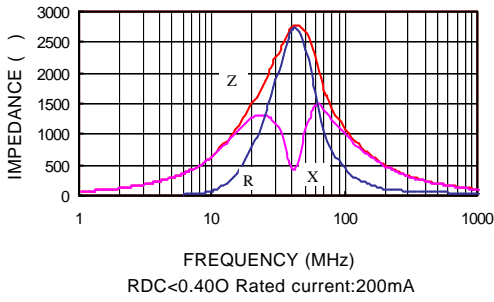

**SBK321611T-152Y-S**

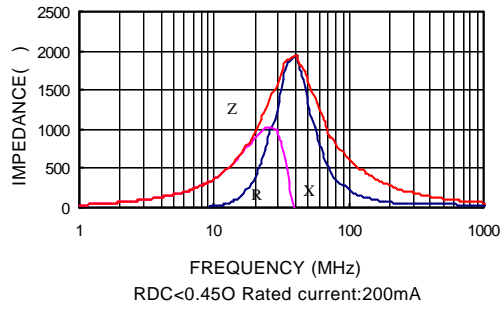

**SBK321611T-202Y-S**

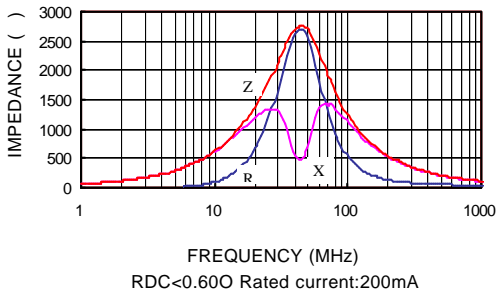

**SBK321611T-272Y-S**

