


Choke Coil –SL Series

SL0608 SERIES

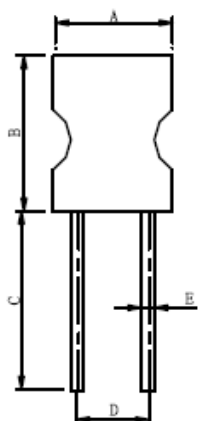

A	8 ⁺⁰
B	12 ⁺⁰
C	15 ⁰
D	3.5±1.5
E	0.65 φ

Part Number	Inductance (mH)	Test Frequency (KHz)	Standard Specification		
			Q Min	DCR (Ω)Max	IDC(mA)
SL0608 □-102K	1.0	252	80	4.0	110
SL0608 □-122K	1.2	252	80	4.7	95
SL0608 □-152K	1.5	252	80	5.9	90
SL0608 □-182K	1.8	252	80	6.0	80
SL0608 □-222K	2.2	252	80	7.3	70
SL0608 □-272K	2.7	252	80	9	65
SL0608 □-332K	3.3	252	80	10	60
SL0608 □-392K	3.9	252	80	11	55
SL0608 □-472K	4.7	252	80	15	52
SL0608 □-562K	5.6	252	80	16	50
SL0608 □-682K	6.8	252	80	22	45
SL0608 □-822K	8.2	252	80	25	40
SL0608 □-103K	10	79.6	80	32.5	35
SL0608 □-123K	12	79.6	80	53	32
SL0608 □-153K	15	79.6	80	62	30
SL0608 □-183K	18	79.6	80	68	28
SL0608 □-223K	22	79.6	80	78	25
SL0608 □-273K	27	79.6	80	90	22
SL0608 □-333K	33	79.6	80	150	20
SL0608 □-393K	39	79.6	80	160	16
SL0608 □-473K	47	79.6	80	190	15